


- Meets IEEE 802.3ab Standards.
- 10/100/1000 Base-T, Surface Mount Type, Open Header .
- 720mA Current Capability Per POE Port / Two-pair.
- RoHS Compliant.
- Operating temperature range: -40°C to +85°C.




Electrical Specifications @25°C											
Part Number	OCL(uH Min) @100KHz, 0.2V With 13mA DC Bias	Turns Ratio (±5%)	Insertion Loss (dB Max)			Return Loss (dB Min)		Cross talk (dB Min)		CMRR (dB Min) 0.5-100MHz	HI-POT (Vrms)
			0.5-100MHz	0.5-40MHz	40.1-100MHz	0.5-40MHz	40.1-100MHz	0.5-40MHz	40.1-100MHz		
G2474CE	350	1CT:1CT	-1.1	-18	-12+20*log(f/80)	-35	-33+20*log(f/50)	30	1500		

MECHANICAL

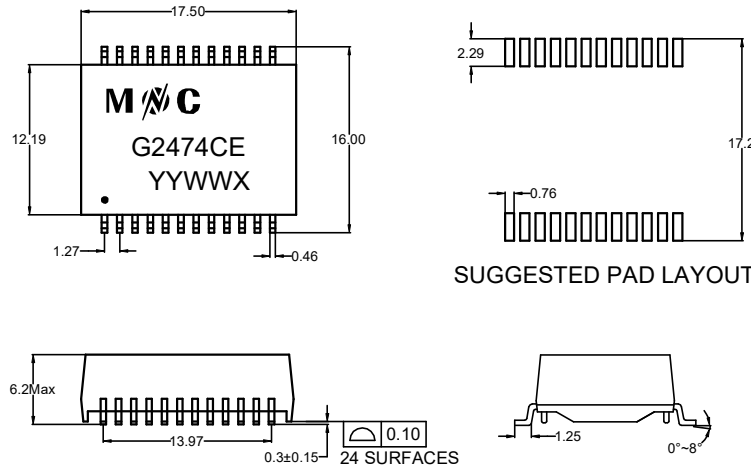

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

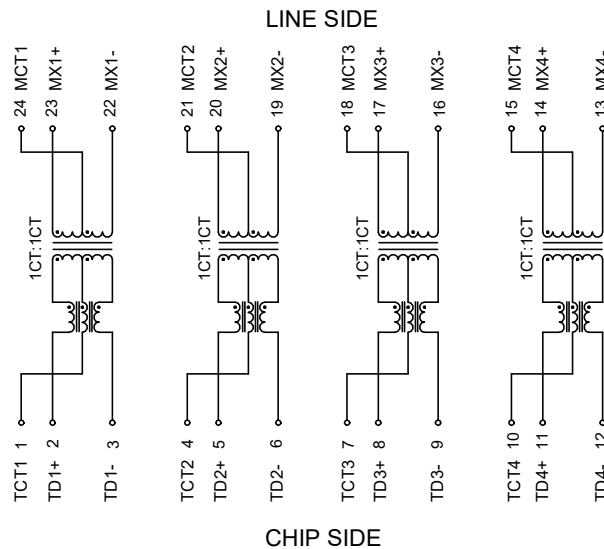

PAN SIZE: 400PCS/REEL
UNIT WEIGHT: 2.04g